



15-CHANNEL REMOTE PROGRAMMING

STEP 1 TO PAIR A REMOTE TO A SHADE

1. Press and hold the learning button on the motor until it jogs and beeps 1 time
2. Press P2 on the remote (shade will jog and beep)
3. Press P2 on the remote (shade will beep)
4. Press the up or down arrow (shade will jog and beep 6 times) The remote is now linked to the shade/motor

NOTE: If shade travels in opposite direction, PRESS and HOLD learning button for 2 jogs and 2 beeps then release. This will reverse motor direction.

STEP 2 LIMIT SETTING MODE

1. Press P2 on the remote (shade will jog and beep)
2. Press the up arrow on the remote (shade will jog and beep)
3. Press P2 on the remote (shade will jog and beep 4 times to confirm you are in the limit setting mode) You can now set the limits


STEP 3 SETTING LIMITS

1. Using the up or down buttons move the shade to the desired upper or lower position (for fine adjustment press P2 while shade is in motion, this will send shade into incremental jogging) press stop button when desired limit is reached. After correct limit position is reached, press the stop button 5 times (shade will jog and beep 1 time) indicating that the limit is set.
2. If limits need to be adjusted after setting, go back to "limit setting Mode" and follow "setting Limits"

ADDING A REMOTE

Start with the remote that currently works with the shade

1. Press P2 on working remote (shade will jog and beep)
2. Press P2 on working remote (shade will jog and beep)
3. Press P2 on remote to add (shade will jog and beep 7 times)

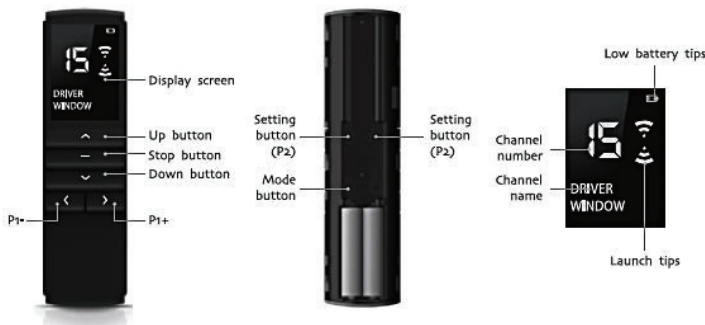

COLEMAN-MACH

DICOR



MAXXAIR

MCD INNOVATIONS

SUBURBAN

AIRXCEL, INC. - MCD Innovations

3303 N. McDonald St. McKinney, TX 75071

800.804.1757

www.AIRXCEL.com

CONTROLLING MULTIPLE SHADES ON A SINGLE CHANNEL (ALL DAY/ALL NIGHT)

1. Locate shade number on controller, press P2 (shade will jog and beep)
2. Press P2 again (shade will jog and beep)
3. Scroll through channels until desired "ALL" channel number is reached
4. Press P2 to add control of that shade to the specific channel number (shade will jog and beep 7 times)
5. Now that shade is controlled with the original channel number and the second "All" channel button
6. Repeat 1 - 4 above with up to 20 individual motors per channel.

REMOVING A REMOTE

1. Start with the remote that currently works the shade
2. Press P2 on working remote
3. Press P2 on working remote
4. Press P2 on the remote to delete

REPLACING A LOST REMOTE

If a shade has been previously programmed but the remote has been lost

1. Press the learning button on the motor for 1 jog and beep
2. Press the up and down buttons on the new remote (shade will jog and beep)
3. The new remote has been added to the shade. The shade will have the same settings as with the previous remote.

WHAT MOTOR JOGS MEAN

1. A single jog = To "pair" a remote to a new motor
2. Two jogs = Reverse motor direction
3. Three jogs = Factory reset

CHANNEL NAME EDITING OPERATION

1. Select the channel you want to edit
2. Press Mode button on back of remote (the first letter of channel name flashes)
3. Press UP/DOWN button to select the desired letter or number After you have reached the desired letter or number, press Channel + to advance to the next character
4. After completing the name edit, press stop to save